


CURRENT 2.0 Ampere
VOLTAGE RANG 20 to 200 Volts

SS22BF THRU SS220BF

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

S M B F

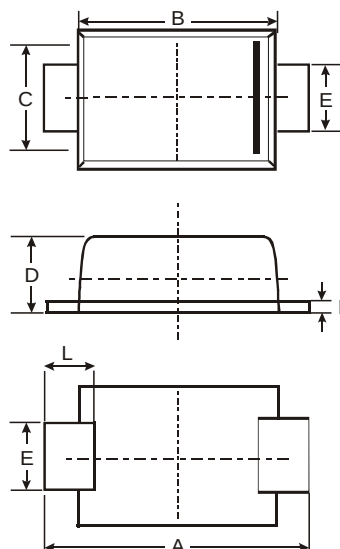

Dim	Min	Max	Typ
A	5.45	5.55	5.50
B	4.27	4.33	4.30
C	3.57	3.63	3.60
D	1.32	1.38	1.35
E	1.96	2.00	1.98
H	0.019	0.021	0.20
L	0.73	0.77	0.75
All Dimensions in mm			

Mechanical Data

- Case: SMBF, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.0018 ounces, 0.09grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	SS22	SS23	SS24	SS25	SS26	SS28	SS210	SS215	SS220	UNITS	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	VOLTS	
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	VOLTS	
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	VOLTS	
Maximum average forward rectified current at T _L (see fig.1)	I _(AV)	2.0									Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50.0									Amps	
Maximum instantaneous forward voltage at 2.0A	V _F	0.55			0.70		0.85			0.95	Volts	
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5							0.2		mA	
		10.0					5.0		2.0			
Typical junction capacitance (NOTE 1)	C _J	220			180							pF
Typical thermal resistance (NOTE 2)	R _{θJA}	75.0									°C/W	
Operating junction temperature range	T _J	-50 to +125					-50 to +150				°C	
Storage temperature range	T _{STG}	-50 to +150									°C	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

CURRENT 2.0 Ampere
VOLTAGE RANG 20 to 200 Volts

SS22BF THRU SS220BF

RATING AND CHARACTERISTIC CURVES SS22 Thru SS220

