

HVR SERIES

微波炉用 HVR 系列双向高压二极管

HVR SERIES BI-DIRECTIONAL HIGH VOLTAGE DIODES FOR MICROWAVE OVENS

We declare that the material of product compliance with RoHS requirements.

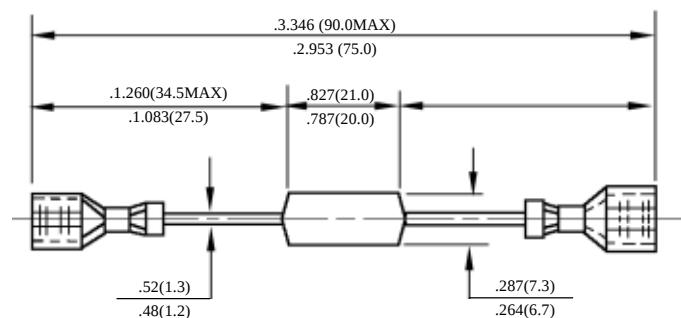
 HVR-2X系列(HVE-2X Series)(T_A= 25°C)

项 目 Description	峰值反向电压 Peak Reverse Voltage		反向击穿电压 Reverse Breakdown Voltage		反向漏电流 Reverse Leakage Current
符 号 Symbols	V _{RM} (KV)		V _B (KV)		I _{RM} (μA)
	D ₁	D ₂	D ₁	D ₂	
条 件 Conditions	I _{RM} = 10 μA	I _{RM} = 10 μA	I _{RM} = 100 μA	I _{RM} = 100 μA	V _R = V _{RM}
HVR-2X0620A	6.0	1.3	7.0min.	1.5 - 2.1	10
HVR-2X062H0A		1.5		1.8 - 2.4	
HVR-2X062H0A(M)		1.7		2.1 - 2.8	
HVR-2X062H1A(ML)		1.7		2.1 - 2.8	

注：“0”A 表示无端子，“1”A 表示有端子；“M”或“ML”申明该产品仅用于微波炉。

“0”no terminal, “1” with terminal; “M” or “ML” means products used in micro wave oven only.

最大额定值(ABSOLUTE MAXIMUM RATINGS):					
项 目 Description	符 号 Symbols	数 值(Ratings)		单 位 Units	条 件 Conditions
		D1	D2		
贮存温度 Storage Temperature	T _{STG}	-40 – +30		°C	
结 温 Junction Temperature	T _J	130		°C	T _A = 125°C
高温漏流 High Temperature Reverse Leakage Current	I _R	100		μA	


 外形尺寸
Outline dimensions