

5 DOT LED LEVEL METER

The KIA6966S is designed for 5 LED level meter driver.
Which is consist of one input amplifier and five comparators for LED level indication.

FEATURES


- Low Spurious Noise Operation.
- Constant Driving Current : $I_o=8\text{mA(Typ.)}$
- Indication Level Steps : 5dB, 5dB, 3dB, 3dB
- Wide Operating Supply Voltage Range
: $V_{cc}=4\sim 12\text{V}$
- Variable Input Amplifier Gain : $G_v=0\sim 20\text{dB}$

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{cc}	14	V
LED Driving Terminal Voltage (Note 1)	V_L	15	V
Power Dissipation (Note 2)	P_D	600	mW
Operating Temperature	T_{opr}	$-25\sim 75$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-55\sim 150$	$^\circ\text{C}$

Note 1 : For Pin①~④ and ⑥

Note 2 : Derated above $T_a=25^\circ\text{C}$ in the proportion of $4.8\text{mW}/^\circ\text{C}$ for KIA6966S.

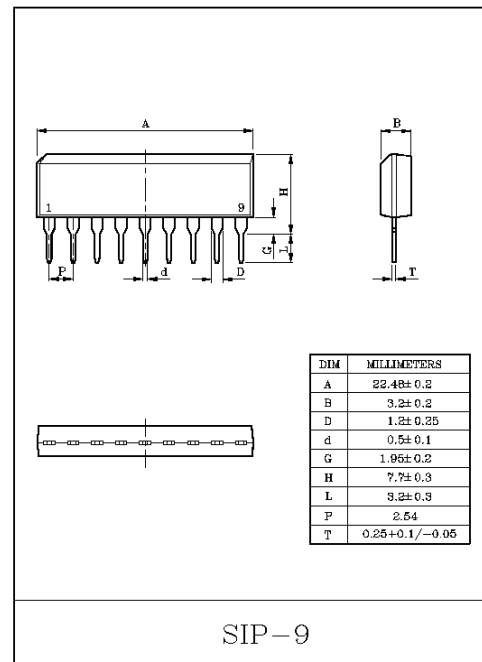


KIA6966S

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, $V_{CC}=9V$, $f=1kHz$, $T_a=25^{\circ}C$)

CHARACTERISTICS	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current	I_{CCQ}	-	$V_{IN}=0V$	-	3	5	mA
Output Current	$I_o(1\sim5)$	-		5	8	10	mA
Output Leak Current	$I_o(OFF)$	-		-	-	50	μA
Sensitivity	$V_{LD5(ON)}$	-	$R_s=24k\Omega$, $R_f=100k\Omega$	-	230	-	mV_{rms}
LED Turn-on Input Level	LD5	-	$R_s=24k\Omega$, $R_f=100k\Omega$ $I_o=1mA$	-1	0	1	dB
	LD4	-		-4	-3	-2	
	LD3	-		-7.5	-6	-4.5	
	LD2	-		-13	-11	-9	
	LD1	-		-19	-16	-13	

TEST CIRCUIT / BLOCK DIAGRAM

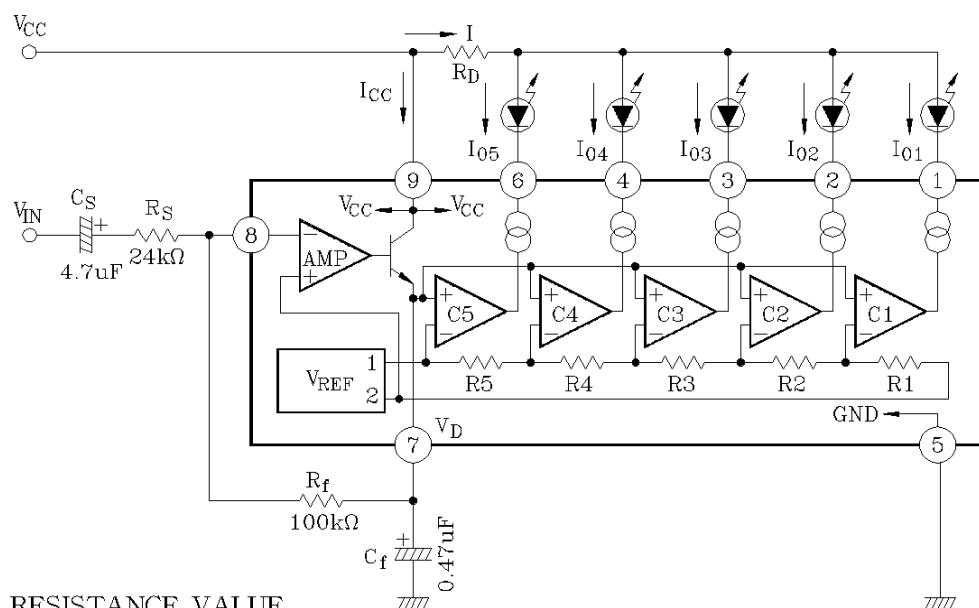


INTERNAL RESISTANCE VALUE

	KIA6966S	UNIT
R1	1.36	$k\Omega$
R2	1.08	$k\Omega$
R3	1.89	$k\Omega$
R4	1.78	$k\Omega$
R5	2.50	$k\Omega$

KIA6966S

PRECAUTION FOR USE AND APPLICATION METHOD

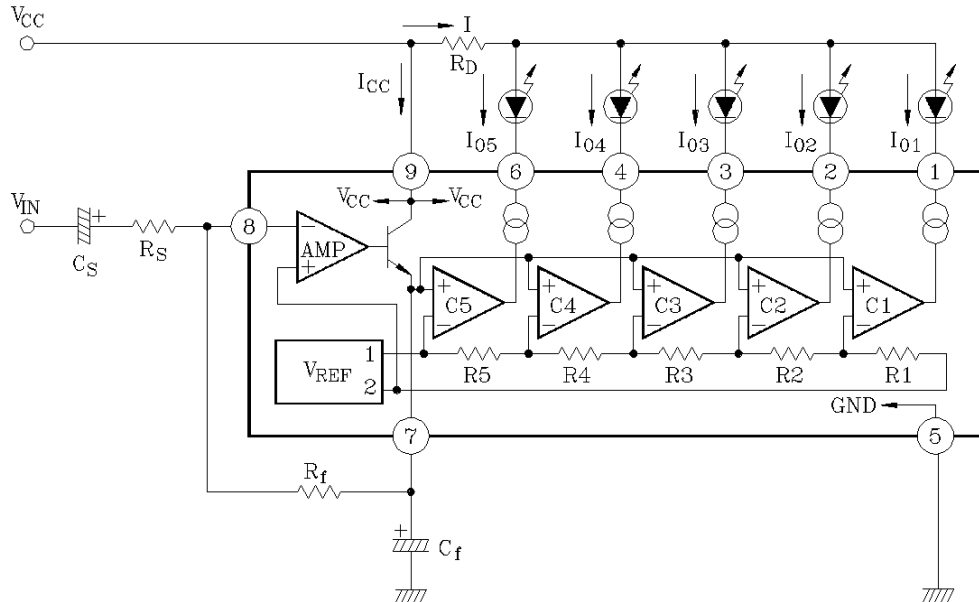

1. Setting of Turn-on Level

Turn-on input level can be set through changing the voltage gain(G_V) of the input amplifier. This voltage gain is determined by the external resistor (R_s , R_f) and obtained by the equation below.

$$G_V = 20 \log \frac{R_f}{R_s} \quad (\text{use in the range of } G_V = 0 \sim 20 \text{ dB})$$

When $G_v=0\text{dB}$ ($R_s=R_f=100\text{k}\Omega$), the turn-on level at fifth LED is $958.3\text{mV}_{\text{rms}}$ (Typ.)

For turning on the fifth LED with the arbitrarily set input level (V_{IN}), use the following equation to set R_s and R_f .

$$\frac{R_f}{R_s} = \frac{958.3mV_{rms}}{V_{IN}} \text{ (Use the resistor of } R_f=56k\Omega \text{ or over)}$$

2. Setting of Power Dissipation and Limiting Resistor

Since the output of this IC is driver by constant current, all the output current ($I_{O1\sim5}$) are dissipated in the IC. Therefore, set the limiting resistor (R_D) so that the power dissipation (P_D) may not exceed the maximum rating because of the ambient temperature.

$$P_D = V_{CC} \cdot I_{CC} + (V_{CC} - R_D \cdot I - V_F) I_{O1} + \dots + (V_{CC} - R_D \cdot I - V_F) I_{O5}$$

Total output current : $I=I_{O1}+I_{O2}+I_{O3}+I_{O4}+I_{O5}$

LED forward voltage : $V_F=1.5V$